



HP Designjet T1120 SD Multifunction Printer large format printer Colour 1200 x 1200 DPI A0 (841 x 1189 mm) Ethernet LAN

Brand : HP

Product family: Designjet

Product code: CM719A

Product name : Designjet
T1120 SD Multifunction Printer




Designjet T1120 SD Print, copy, scan, A4, A3, A2, A1, A0, HP-GL/2, HP-RTL, CALS G4, HP PCL 3 GUI, 1000Base-T, USB 2.0
HP Designjet T1120 SD Multifunction Printer. Maximum resolution: 1200 x 1200 DPI, Page description languages: HP-GL/2, HP-RTL, Colour depth: 48 bit. Copier resize: 25 - 400%, Maximum number of copies: 50 copies. Scanning: Colour scanning, Scanner type: Sheet-fed scanner, Scan technology: 6 x 10,000 pixels Contact Image Sensor (CIS) with 1 sensor line and 3 blinking LED's (Red;.... Total input capacity: 1 sheets. Maximum print size: A0 (841 x 1189 mm), Media types supported: Printer: bond and coated paper (bond, coated, heavyweight coated, super heavyweight plus matte,..., ISO A-series sizes (A0...A9): A0, A1, A2, A3, A4

Printing		Ports & interfaces	
Print head nozzles	1056	USB connector	USB Type-A
Colour management	HP Color Center, HP Vivera inks, Closed-loop color system	USB 2.0 ports quantity	1
Colour *	✓	RJ-45 ports quantity	1
Maximum resolution *	1200 x 1200 DPI	Performance	
Number of print cartridges *	6	Display	Printer: 240 x 160 LCD grayscale 4 bits per pixel; scanner: 9-in LCD touchscreen with 800 x 480 resolution LCD
Page description languages *	HP-GL/2, HP-RTL	Built-in processor	Printer: Intel Pentium M; scanner: Intel Pentium M
Colour depth	48 bit	Processor frequency	1500 MHz
Print cartridge volume (metric)	HP 72 Ink Cartridge: cyan, gray, magenta, matte black, photo black, yellow (130 ml); cyan, gray, magenta, photo black, yellow (69 ml)	Certification	Energy Star; WEEE; EU RoHS; China RoHS; REACH; EuP
Print head	3	Power	
Print speed (colour image, best quality, glossy paper)	2.8 m ² /hr 30 ft ² /hr	Power requirements	100 - 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz), 2 A
Print speed (colour image, draft quality, coated paper)	41 m ² /hr 445 ft ² /hr	Power consumption (typical)	330 W
Print speed (colour image, normal quality, coated paper)	110 ft ² /hr 10 m ² /hr	Operational conditions	
Print speed (colour image, normal quality, glossy paper)	72 ft ² /hr 6.7 m ² /hr	Recommended operating temperature range (T-T)	15 - 35 °C
Print speed (imperial)	72 D prints per hour	Operating temperature (T-T)	5 - 40 °C
Print speed colour line drawing (draft, A1 plain paper)	56 A1 prints per hour	Operating relative humidity (H-H)	20 - 80%
Print time black and white line drawing (draft, metric A1 plain paper)	35 sec/page	Storage temperature (T-T)	-25 - 55 °C
Print time colour line drawing (draft, A1)	35 sec/page	Operating temperature (T-T)	59 - 95 °F
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude (imperial)	9842 ft
		Operating altitude	0 - 3000 m
Copying		System requirements	
Copy resolution (black graphics)	Up to 9600 dpi	Browser supported	Internet Explorer (5.0 or higher); Netscape (6.0.1 or higher); Safari for Mac OS (10.3 or higher); Mozilla (1.5 or higher)
Copy resolution (colour text and graphics)	9600 DPI		Windows Vista (R) (32 and 64-bit); Windows Server 2008 (32 and 64-bit); Windows XP Home and Professional (32 and 64-bit); Windows Server 2003 (32/64 bit); Mac OS X v 10.4; Mac OS X v 10.5; Novell NetWare 5.x, 6.x; Citrix XenApp; Citrix XenServer
Copier resize	25 - 400%	Compatible operating systems	
Maximum number of copies	50 copies		
Copier settings	Original type; quality; original size; resize; color management; batch; image quality settings (sharpness, lightness, contrast, background cleaning)		
Colour copy capability	✓		
		Weight & dimensions	
		Dimensions (WxDxH)	1770 x 1000 x 1450 mm

Scanning		Weight & dimensions	
Scanning *	Colour scanning	Weight	140 kg
Scanner type	Sheet-fed scanner	Size (imperial)	177 cm (69.7")
Scan technology	6 x 10,000 pixels Contact Image Sensor (CIS) with 1 sensor line and 3 blinking LED's (Red; Green; and Blue); 48-bit color data capture; 16-bit grayscale data capture	Weight (imperial)	309 lb
		Packaging data	
Scan quality (black, best)	400 DPI	Package weight	206 kg
Scan quality (black, normal)	300 DPI	Package dimensions (WxDxH)	1930 x 766 x 1283 mm
Scan quality (colour, best)	300 DPI	Package dimensions (W x D x H)	1971 x 789.9 x 1287.8 mm (77.6 x 31.1 x 50.7")
Scan quality (colour, normal)	300 DPI	Package weight (imperial)	205.9 kg (454 lbs)
Hardware scan resolution	1200 x 1200 DPI	Bundled software	HP Instant Printing Utility
Scan file formats	JPG, PDF	Other features	
Linear scan speed (metric)	Color (200 dpi): up to 3.81 cm/sec; black and white (200 dpi): up to 12.7 cm/sec	Minimum system requirements for Macintosh	Mac OS X v 10.4 or higher: PowerPC G3 or Intel Core Processor; 256 MB RAM; 1 GB available hard disk space
Scan quality (black, draft)	200 DPI	Line accuracy	+/- 0.1%
Scan quality (colour, draft)	200 DPI	Compatible ink types, supplies	Dye-based (C, M, Y, G, PK); pigment-based (MK)
Minimum scan size	152 x 112 mm	Acoustic power emissions	6.9 B(A)
Linear scan speed (imperial)	Color (200 dpi): up to 1.5 in/sec; black and white (200 dpi): up to 5 in/sec	Acoustic pressure emissions	55 dB
	Minimum scan area	Print quality (colour, best quality)	2400 DPI
152.4 x 111.8 mm (6 x 4.4")			Windows XP Home, Windows XP Professional: Intel Pentium 4 (1 GHz); 512 MB RAM; 2 GB available hard disk space Mac OS X v 10.4 or higher: PowerPC G4, G5, or Intel Core Processor; 1 GB RAM; 2 GB available hard disk space
Input & output capacity		Minimum system requirements	
Total number of input trays	1		
Total input capacity	1 sheets		
Paper handling		Embedded web server	✓
Paper handling	Printer: sheet feed, roll feed; Scanner: sheet feed; output basket	Greyscale levels	256
Duplex print options	None (not supported)	Electromagnetic compatibility	Compliance for Class A ITE products: EU (EMC Directive), USA (FCC Rules), Canada (ICES), Australia (ACA), New Zealand (MoC), China (CCC), Japan (VCCI); Certified as Class A product: Korea (MIC), Taiwan (BSMI)
Maximum print length	91 m		
Maximum length of sheet media	1676.4 mm	Print quality (black, normal quality)	600 DPI
Standard media sizes	A4, A3, A2, A1, A0	Printer management	HP Web Jetadmin, HP Printer Utility
		Safety	USA and Canada (CSA certified); EU (LVD and EN60950-1 compliant); Russia (GOST); China (CCC); Argentina (IRAM); Mexico (NYCE)
Media types supported	Printer: bond and coated paper (bond, coated, heavyweight coated, super heavyweight plus matte, colored), technical paper (natural tracing, translucent bond, vellum), film (clear, matte, polyester), photographic paper (satin, gloss, semi-gloss, matte, high-gloss), backlit, self-adhesive (two-view cling, indoor paper, polypropylene, vinyl); scanner: non-abrasive paper, vellum, mylar, sepia, blueprints, plastic film, plastic laminate, foam board, cardboard. (No plywood, stone plates, metal plates or abrasive, dirty, rough, sharp edged, metal clamped, or burned surfaces or transparencies)	Print quality (black, best quality)	2400 x 1200 DPI
		Print quality (black, draft quality)	600 DPI
Custom media sizes	216 x 279 - 1118 x 1676 mm	Coated paper	✓
		Photo paper	✓
Maximum print size *	A0 (841 x 1189 mm)	Functions	Print; copy; scan
ISO A-series sizes (A0...A9)	A0, A1, A2, A3, A4	Driver updates	http:///go/T1120SD-MFP/drivers
Media thickness	0.8 mm	Ink drop	6 pl (C, M, PK, G), 9 pl (Y, MK)
Maximum roll length	91.4 m	Control panel	Printer: 240 x 160 pixels grayscale graphical display with Asian fonts support; 4 direct-access buttons and 7 navigation buttons; 2 bicolor lights (Ready, Processing, Attention, Error); scanner: 9-in LCD touchscreen
Maximum roll diameter	13.5 cm		
Print margin cut-sheet	5 x 16.75 x 5 x 5	Scan input modes	On the touchscreen: scan preview, scan to file, scan to network, copy, batch scanning, batch copying
Print margin roll	5 mm	Colour space standard	sRGB
Maximum media width	Printer: 1118 mm; scanner: 1198 mm	Driver LAN	Novell NetWare 5.x/6.x clients
Media weights by paper path	60 to 328 g/m²	JetDirect Compatible Products	✓
Recommended media weight	60 - 328 g/m²	Line width minimum	0.0024 in (ISO/IEC 13660:2001(E))
Media handling	Printer: sheet feed; roll feed; automatic cutter; scanner: sheet feed	Maximum print length (imperial)	300 ft (operating system and application dependent)
Maximum paper trays	1	Maximum media length (imperial)	66"

Paper handling		Other features	
Paper handling standard/input	Printer: roll loading, single-sheet rear tray; scanner: sheetfed	Media sizes standard (imperial rolls)	Letter to E-size sheets; 11 to 44-in rolls
Paper handling standard/output	Basket	Non-printable area (imperial cut-sheet)	0.2 x 0.67 x 0.2 x 0.2 in
Roll top margin	5 mm	Roll maximum input	1
Media sizes supported (imperial)	A, B, C, D, E	Print resolution (colour, normal quality)	600 x 600 DPI
Media thickness (by paper path)	Up to 31.5 mil		
Media thickness (imperial)	0.04"		
Non-printable area roll media (imperial)	0.2 x 0.2 x 0.2 x 0.2 in (borderless on photo papers)		
Roll paper	✓		
Ports & interfaces			
Ethernet interface type	Gigabit Ethernet		
Ethernet LAN *	✓		
USB port *	✓		

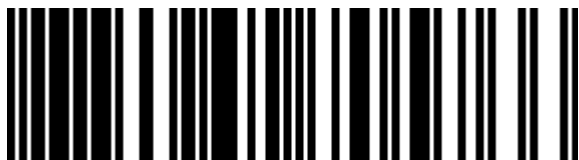

0884962705766



884962705766



0884420612483



884420612483



0884420612506



884420612506



0884420612452



884420612452



0884420612445



884420612445



0884420612438




884420612438



0884420612421



884420612421

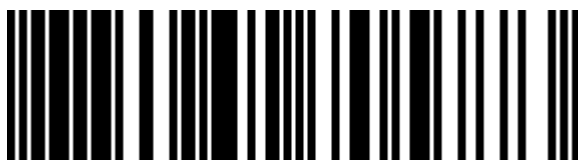

0884962705773



884962705773



0884420612476



884420612476



0884420612513



884420612513



0884420612469




884420612469



0884420612490



884420612490

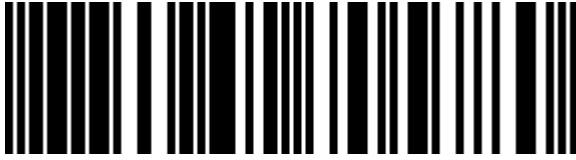

0884962705780



884962705780

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.