



HP Designjet 110plus Printer large format printer Colour 1200 x 600 DPI A1 (594 x 841 mm)

Brand : HP

Product family: Designjet

Product code: C7796D

Product name : Designjet 110plus Printer



Expand your in-house colour printing capabilities on a range of common and large-format media sizes – all at a low purchase price. The versatile, multi-format HP Designjet 110plus produces professional results for all your document needs.

HP Designjet 110plus Printer. Maximum resolution: 1200 x 600 DPI, Printing colours: Black, Cyan, Magenta, Yellow, Maximum duty cycle: 7000 pages per month. Total input capacity: 150 sheets, Total output capacity: 50 sheets, Maximum input capacity: 100 sheets. Maximum print size: A1 (594 x 841 mm), Media types supported: Paper (plain, inkjet, coated, heavyweight, semi-gloss, glossy, proofing, photo, brochure/flyer,...), ISO A-series sizes (A0...A9): A1, A2, A3, A4. USB connector: USB Type-A. Internal memory: 64 MB, Built-in processor: Impala 2 ASIC, Processor frequency: 16 MHz

Printing		System requirements	
Print head nozzles	304	Compatible operating systems	Microsoft Windows XP Home, XP Professional, Windows Vista; Mac OS 9.2; Mac OS 10.2; Mac OS 10.3, 10.4 and 10.5
Colour printing technology	HP Color Layering technology		
Colour *	✓		
Maximum resolution *	1200 x 600 DPI		
Printing colours *	Black, Cyan, Magenta, Yellow		
Maximum duty cycle	7000 pages per month		
Print head	4 (1 each cyan, magenta, yellow, black)		
Print time colour line drawing (draft, A1)	Up to 1.5 min/page		
Input & output capacity		Sustainability	
Total number of input trays	1	Sustainability certificates	ENERGY STAR
Total input capacity	150 sheets		
Total output capacity	50 sheets		
Maximum input capacity	100 sheets		
Maximum output capacity	50 sheets		
Paper handling		Weight & dimensions	
Paper handling	Sheetfed (automatic input tray for 150 sheets up to A2+, front manual single-sheet feed, rear manual path for thick media), optional roll-feed with automatic cutter	Maximum dimensions (W x D x H)	1042 x 1020 x 220 mm
		Dimensions (WxDxH)	1042 x 414 x 220 mm
Duplex print options	None (not supported)	Weight	22 kg
Maximum length of sheet media	1625 mm	Pallet dimensions (W x D x H)	1200 x 110 x 2098 mm
Standard media sizes	A1, A1+, A2, A3, A4, B2, B3, B4, envelopes	Pallet dimensions (W x D x H) (imperial)	1198.9 x 1099.8 x 2098 mm (47.2 x 43.3 x 82.6")
Media types supported	Paper (plain, inkjet, coated, heavyweight, semi-gloss, glossy, proofing, photo, brochure/flyer, natural tracing), translucent bond, A4 transparencies	Product dimensions when open (LxWxD)	104.1 cm (41")
		Size (imperial)	61 cm (24")
Custom media sizes	Tray 1: 76 x 142 to 457 x 610 mm; manual sheet feed: 110 x 205 to 625 x 1625 mm; rear path: 110 x 205 to 625 x 1625 mm; roll feed: up to 609 mm	Weight (imperial)	48.5 lb
Maximum print size *	A1 (594 x 841 mm)		
ISO A-series sizes (A0...A9)	A1, A2, A3, A4		
ISO B-series sizes (B0...B9)	B2		
Maximum roll length	45.7 m		
Maximum roll diameter	10 cm		
Print margin cut-sheet	5 x 12 x 5 x 5		
		Packaging data	
		Package weight	34 kg
		Package dimensions (WxDxH)	1192 x 545 x 493 mm
		Package dimensions (W x D x H)	1191.3 x 546.1 x 492.8 mm (46.9 x 21.5 x 19.4")
		Package weight (imperial)	34 kg (75 lbs)
		Bundled software	HP Designjet System Maintenance
		Other features	
		Minimum system requirements for Macintosh	iMac G3, G4, G5 dual processor; iBook; PowerBook; eMac
		Line accuracy	+/- 0.2 %
		Minimum line width	0.04 mm
		Compatible ink types, supplies	Black: HP pigment ink; cyan, magenta, yellow: HP dye-based ink
		Acoustic power emissions	6.2 B(A) (active, printing), 5.4 B(A) (standby)
		Print quality (colour, best quality)	1200 DPI
		Minimum system requirements	Pentium III (733 MHz), 128 MB RAM, 400 MB available hard disk space
			Pentium 4 (1 GHz), 256 MB RAM, 2 GB available hard disk space
		Embedded web server	✓


Paper handling		Other features	
Print margin roll	5 mm	Electromagnetic compatibility	Compliant with requirements for Class B ITE products (Class A when connected to LAN cables), EU (EMC Directive), US (FCC rules), Canada (DOC), Australia (ACA), New Zealand (MoC), China (CCC), Japan (VCCI), Class A for Korea (MIC), Taiwan (BSMI)
Media weights by paper path	Tray 1: 65 to 150 g/m2; manual single-sheet feed: 65 to 150 g/m2; rear path: up to 300 g/m2		
Maximum media width	625 mm through front manual feed path		
Roll top margin	5 mm	Print quality (black, draft quality)	600 DPI
Recommended media weight	Tray 1: 65 - 150; manual single-sheet feed: 65 - 210; rear path: up - 300; roll feed: 65 - 150	Printer management	HP Designjet System Maintenance
Media handling	Input tray, manual single-sheet feed, rear path (minimum A2, maximum A1 oversize), roll feed through rear path	Safety	ITE product compliance, EU LVD, CSA Certified for US and Canada, Mexico NOM-1-NYCE, Argentina IRAM, China CCC, Singapore PSB, Russia GOST, Poland PCBC, Korea KTL
Maximum paper trays	1	Print quality (black, normal quality)	600 DPI
Paper handling optional/input	Optional automatic roll feed, spindle	Downloadable software	None
Paper handling standard/input	100-sheet A2-size input tray, manual single-sheet feed, single-sheet rear path for thick media, optional automatic roll feed	Print quality (black, best quality)	1200 x 600 DPI
Media sizes supported (imperial)	Letter, legal, tabloid, C, D, D+, envelopes	Glossy paper	✓
Media thickness (by paper path)	Tray 1: up to 8 mil; envelopes: up to 15 mil; front path: up to 8 mil; rear path: up to 15 mil	Coated paper	✓
Non-printable area roll media (imperial)	0.2 x 0.2 x 0.2 x 0.2 in	Photo paper	✓
Recommended media weight (imperial)	17 to 56 lb	Driver updates	Latest driver upgrade information available on http://
Ports & interfaces		Ink drop	4 pl (cyan, magenta, yellow), 18 pl (black)
Ethernet LAN *	✗	Proofing paper	✓
USB port *	✓	Control panel	2 LEDs for status: Power, Attention; 3 keys: Power, Cancel, OK; display area containing information icons
USB connector	USB Type-A	Acoustic power emissions (standby)	54 dB
USB 2.0 ports quantity	1	JetDirect Compatible Products	✓
Parallel ports quantity	1	Line width minimum	0.001 in
Performance		Maximum print length (imperial)	64 in
Internal memory	64 MB	Maximum media length (imperial)	63.98"
Built-in processor	Impala 2 ASIC	Media sizes standard (imperial rolls)	3 to 24.6-in wide sheets
Processor frequency	16 MHz	Non-printable area (imperial cut-sheet)	0.2 x 0.47 x 0.2 x 0.2 in
Drive device, buffer size	32 MB	UNSPSC-code	43212107
Power		Acoustic pressure emissions (standby)	37 dB(A)
Power requirements	Input voltage 100 to 240 VAC (± 10%) auto ranging, 50/60 Hz (± 3Hz), 2 amp maximum	Logistics data	
Operational conditions		Products per pallet	10 pc(s)
Recommended operating temperature range (T-T)	15 - 30 °C		
Operating temperature (T-T)	15 - 30 °C		
Operating relative humidity (H-H)	20 - 80%		
Storage temperature (T-T)	-20 - 55 °C		
Operating temperature (T-T)	59 - 86 °F		
Storage relative humidity (H-H)	20 - 80%		
System requirements			
Mac compatibility	✓		
Browser supported	Microsoft Internet Explorer 5.5 and above, Netscape 6.1 and above		



0829160962306




829160962306

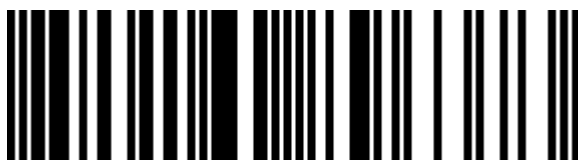

0829160896373



829160896373

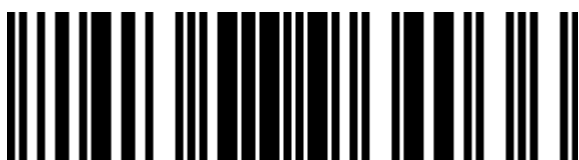

8291608964036




8844203596470



0884420359647




884420359647

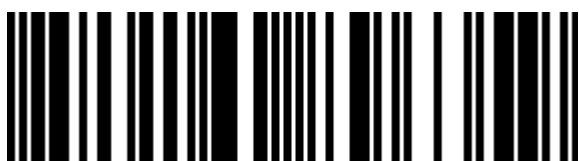

0829160896359




829160896359

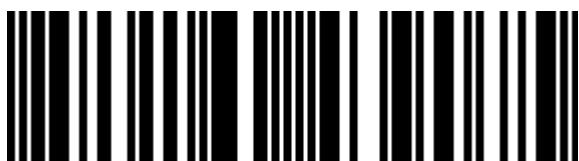

0829160439075




829160439075

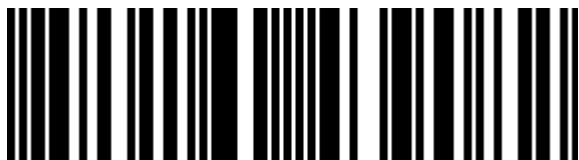

0829160439082




829160439082

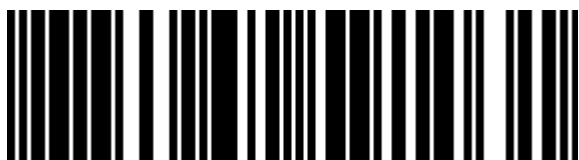

0884962591031




884962591031

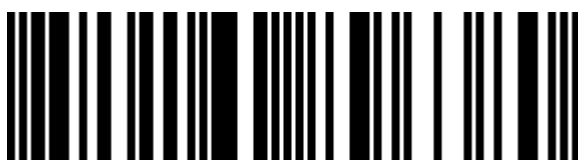

0829160896380




829160896380

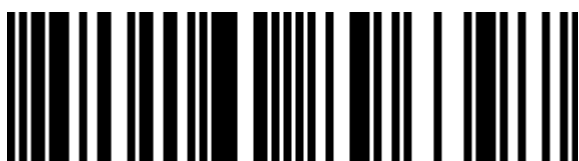

0829160896397




829160896397

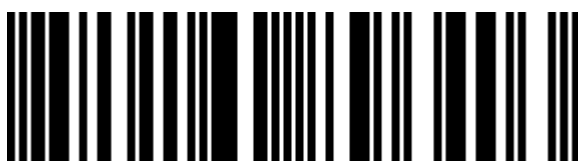

0829160896403




829160896403

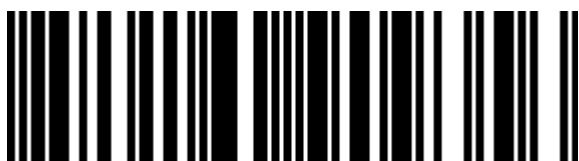

0829160909356




829160909356

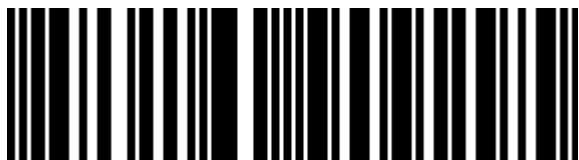

0829160909295




829160909295

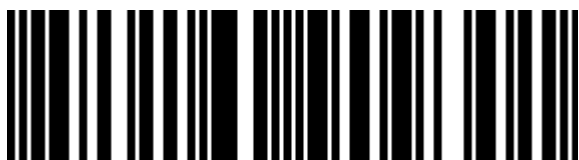

0829160909301




829160909301

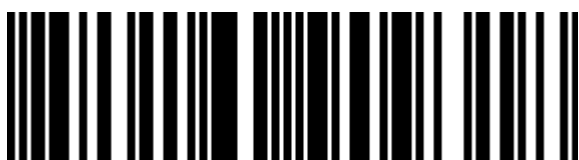

0829160909318




829160909318

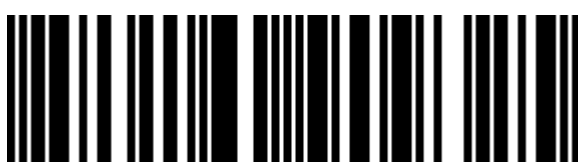

0829160909325




829160909325

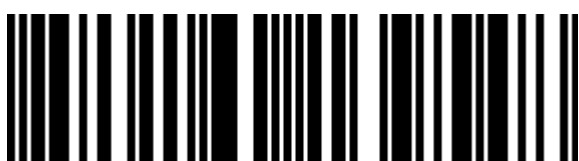

0829160139548



829160139548

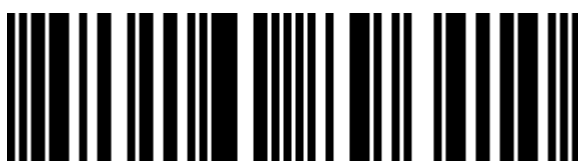

0829160896410



829160896410



0829160896366



829160896366



0829160909332



829160909332



0829160909349



829160909349



0884962214848



884962214848

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.