



HP Designjet T1100ps 1118 mm Printer large format printer Ethernet LAN



Brand : HP

Product family: Designjet

Product code: Q6688A

Product name : Designjet T1100ps 1118 mm Printer

HP Designjet T1100ps 44-in Printer

[HP Designjet T1100ps 1118 mm Printer large format printer Ethernet LAN:](#)

Designed to increase your productivity, the HP Designjet T1100 Printer series enables easy, efficient workteam printing for all your CAD and GIS projects. Using HP Viverna inks, the Three-black ink set enhances detail and produces images with even subtle contrasts from vivid colour to soft tones, plus true neutral grey. Fast print and processing speeds; networking, manageability features and full compatibility enable time savings and printing dependability on your CAD and GIS projects.

Features

Printing		Sustainability	
Print head nozzles	1056	Sustainability certificates	ENERGY STAR
Colour management	HP Color Center, HP Viverna inks, Closed-loop color system	Weight & dimensions	
Page description languages *	TIFF	Maximum dimensions (W x D x H)	1770 x 732 x 1047 mm
Printing colours *	Cyan, Magenta, Matte black, Photo black, Yellow	Dimensions (WxDxH)	1770 x 661 x 1047 mm
Print head	3 (matte black and yellow, magenta and cyan, photo black and gray)	Weight	86 kg
		Pallet dimensions (W x D x H)	1965 x 780 x 780 mm
		Dimension note (imperial)	printer with stand
Print speed (colour image, best quality, glossy paper)	2.8 m2/hr 30 ft2/hr	Dimension note (metric)	printer with stand
Print speed (colour image, draft quality, coated paper)	41 m2/hr 445 ft2/hr	Pallet dimensions (W x D x H) (imperial)	1963.4 x 779.8 x 779.8 mm (77.3 x 30.7 x 30.7")
Print speed (colour image, normal quality, coated paper)	110 ft2/hr 10 m2/hr	Pallet weight (imperial)	142.9 kg (315 lbs)
Print speed (colour image, normal quality, glossy paper)	72 ft2/hr 6.7 m2/hr	Product dimensions when open (LxWxD)	177 cm (69.7")
Print speed (imperial)	70 D prints per hour	Size (imperial)	177 cm (69.7")
Print speed colour line drawing (draft, A1 plain paper)	52 A1 prints per hour	Weight (imperial)	printer with stand 189.0 lb
Print time black and white line drawing (draft, metric A1 plain paper)	35 sec/page	Packaging data	
Print time colour line drawing (draft, A1)	35 sec/page	Package weight	123 kg
		Package dimensions (WxDxH)	1965 x 780 x 780 mm
		Package dimensions (W x D x H)	1963.4 x 779.8 x 779.8 mm (77.3 x 30.7 x 30.7")
		Package weight (imperial)	122.9 kg (271 lbs)
Input & output capacity		HP-GL/2, HP-RTL Windows drivers, PS Windows drivers, Optimized Windows driver for AutoCAD 2000 and higher, support for Citrix MetaFrame environments, PS driver for Mac OS X, Autodesk Design Review	
Total number of input trays	1	Bundled software	
Total input capacity	1 sheets		
Paper handling			
Paper handling	Roll feed, sheet feed		
Maximum print length	91 m	Other features	
Maximum length of sheet media	1676.4 mm	Minimum system requirements for Macintosh	Mac OS X v10.2, Mac OS X v10.3, Mac OS X v10.4 or higher; PowerPC G3 or Intel Core Processor; 256 MB RAM; 1 GB available hard disk space
Standard media sizes	A4, A3, A2, A1, A0		
		Typefaces	Roman configuration: 139 fonts; Kanji configuration: 243 fonts
		Line accuracy	+/- 0.1%

Paper handling		Other features		
Media types supported	Bond and coated paper (bond, coated, heavyweight coated, super heavyweight coated), photographic paper (satin, gloss, semi-gloss, matte), technical paper (natural tracing, translucent bond, vellum), film (transparent, matte), self-adhesive and vinyl (polypropylene, vinyl)	Minimum line width	0.0423 mm	
		Compatible ink types, supplies	HP Vivera inks	
		Acoustic power emissions	6.9 B(A)	
		Acoustic pressure emissions	57 dB	
Media thickness	> 0.8	Minimum system requirements	Windows 2000: Intel Pentium III (733 MHz), 256 MB RAM, 2 GB available hard disk space; Windows XP Home, Windows XP Professional: Intel Pentium IV (1 GHz), 512 MB RAM, 2 GB available hard disk space	
Maximum roll length	91.4 m		Windows 2000: Intel Pentium III (733 MHz), 512 MB RAM, 2 GB available hard disk space; Windows XP Home, Windows XP Professional: Intel Pentium IV (1 GHz), 512 MB RAM, 2 GB available hard disk space	
Maximum roll diameter	13.6 cm		Mac OS X v10.2, Mac OS X v10.3, Mac OS X v10.4 or higher; PowerPC G4, G5, or Intel Core Processor; 1 GB RAM; 2 GB available hard disk space	
Print margin cut-sheet	5 x 16.75 x 5 x 5			
Print margin roll	5 mm			
Maximum media width	1118 mm			
Roll top margin	5 mm			
Media weights by paper path	60 to 328 g/m2			
Recommended media weight	60 - 328 g/m²			
Media handling	Sheetfed, roll feed, automatic cutter			
Maximum paper trays	1		Embedded web server	✓
Paper handling standard/input	Roll loading, single sheet rear tray		Electromagnetic compatibility	Compliance for Class B products:EU (EMC Directive), USA (FCC Rules), Canada (DoC), Australia (ACA), New Zealand (MoC), China (CCC), Japan (VCCI); Certified as Class A product: Korea (MIC), Taiwan (BSMI)
Paper handling standard/output	Basket			
Bottom copy margin	16.75 mm			
Left metric copy margin	5 mm			
Right metric copy margin	5 mm	Printer management	HP Web Jetadmin, HP Easy Print Care/Printer Utility	
Top metric copy margin	5 mm			
Media sizes supported (imperial)	A, B, C, D, E			
Media thickness (by paper path)	Tray 1: up to 31.5 mil	Safety	USA and Canada (CSA certified), EU (LVD and EN60950-1 compliant), Russia (GOST), Singapore (PSB), China (CCC), Argentina (IRAM), Mexico (NYCE)	
Non-printable area roll media (imperial)	0.2 x 0.2 x 0.2 x 0.2 in (borderless on photo papers)			
Ports & interfaces		Air pressure	0.69 mmH2O	
Ethernet interface type	Gigabit Ethernet	Maximum media length (imperial)	66"	
Ethernet LAN *	✓	Print resolution (colour, normal quality)	600 x 600 DPI	
USB port *	✓	Print quality (black, best quality)	2400 x 1200 DPI	
USB connector	USB Type-A	Print quality (black, draft quality)	600 DPI	
USB 2.0 ports quantity	1	Print quality (black, normal quality)	600 DPI	
RJ-45 ports quantity	1	Driver updates	Latest driver upgrade information available on http://	
Performance		Ink drop	6 pl (C, M, PK, G), 9 pl (Y, MK)	
Built-in display *	✓	Control panel	240 x 160 pixels grayscale graphical display with Asian fonts support, 4 direct-access buttons and 7 navigation buttons, 2 bi-colour lights (Ready, Processing, Attention, Error)	
Display	LCD			
Internal memory	256 MB			
Internal storage capacity	40 GB			
Storage media	HDD	Technical features	Attain exacting detail—with gray HP Vivera Ink and improved line accuracy to 0.1%, 0.067 mm minimum line width Posters, presentations make a powerful impression—create hard-to-achieve tones with the Three-black ink set. Count on consistent, professional prints with over 20 Original HP media substrates—designed with Vivera Inks. Your work is preserved with the smudge-resistant prints produced by fast-drying HP Vivera Inks. Print CAD & GIS projects quickly and accurately—up to 35 seconds/A1 page—with HP Scalable Printing Technology. Send and print large jobs reliably over the network with in-printer processing architecture. Present your professional best—HP Vivera Inks produce a wide range of colors, from vivid color to soft tones.	
Built-in processor	Intel Centrino mobile			
Processor frequency	600 MHz			
Drive device, buffer size	9 MB			
Certification	RoHS, WEEE			
Power		Technical features	Attain exacting detail—with gray HP Vivera Ink and improved line accuracy to 0.1%, 0.067 mm minimum line width Posters, presentations make a powerful impression—create hard-to-achieve tones with the Three-black ink set. Count on consistent, professional prints with over 20 Original HP media substrates—designed with Vivera Inks. Your work is preserved with the smudge-resistant prints produced by fast-drying HP Vivera Inks. Print CAD & GIS projects quickly and accurately—up to 35 seconds/A1 page—with HP Scalable Printing Technology. Send and print large jobs reliably over the network with in-printer processing architecture. Present your professional best—HP Vivera Inks produce a wide range of colors, from vivid color to soft tones.	
Power requirements	Input voltage (autoranging) 100 to 240 VAC (+/- 10%), 50/60 Hz (+/- 3 Hz), 2 amp max			
Power consumption (typical)	200 W			
Operational conditions				
Recommended operating temperature range (T-T)	15 - 35 °C			
Operating temperature (T-T)	5 - 40 °C			
Operating relative humidity (H-H)	20 - 80%			
Storage temperature (T-T)	-25 - 55 °C			
Operating temperature (T-T)	59 - 95 °F			
Storage relative humidity (H-H)	0 - 95%			
Operating altitude (imperial)	9842 ft			

System requirements		Other features	
Browser supported	Microsoft Internet Explorer (5.0 or higher), Netscape (6.0.1 or higher), Safari for Mac OS (10.3 or higher), Mozilla (1.5 or higher)	Acoustic power emissions (standby)	44 dB
		Driver LAN	Novell NetWare 3.x/4.x clients
		JetDirect Compatible Products	✓
Compatible operating systems	Windows 2000, Windows XP Home, Windows XP Professional, Windows XP Professional x64, Windows Server 2003, Windows Vista Ready; Novell NetWare 5.x, 6.x; Mac OS X v10.2 or higher; Citrix MetaFrame	Line width minimum	0.002 in
		Maximum print length (imperial)	300 ft; Operating system and application dependent
		Media sizes standard (imperial rolls)	8.5 to 44-in wide sheets, 11 to 44-in rolls
		Non-printable area (imperial cut-sheet)	0.2 x 0.67 x 0.2 x 0.2 in
		Roll maximum input	1
		Logistics data	
		Products per pallet	1 pc(s)
		Pallet gross weight	143 kg



0883585045273




883585045273



0883585045181



883585045181

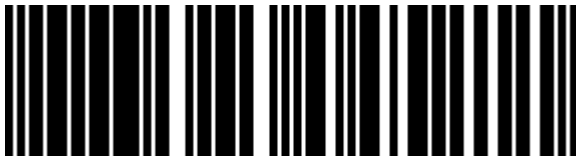

0883585045211



883585045211



0883585045327



883585045327



8835850452806



0883585045204



883585045204



0883585045310



883585045310



0883585045242



883585045242



0883585045341



883585045341



0883585045358



883585045358



0883585045365



883585045365



0883585045372



883585045372



0883585045259



883585045259



0883585045228



883585045228



0883585045198



883585045198



0883585045235



883585045235



0883585045266



883585045266



0883585045280



883585045280



0883585045297



883585045297



0883585045303



883585045303



0883585045389



883585045389



0883585045334



883585045334

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.